


# Bullfix Radiator Brackets- Data Sheet

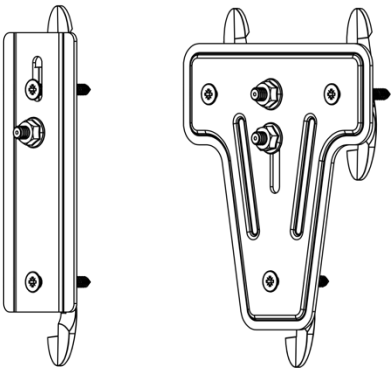

	RAD-SUP-....	RAD-SUPEX-....
Maximum recommended weight of radiator with water. Cantilever Load @ 60mm from wall (15mm Plasterboard)	65 Kg	110 Kg
Maximum recommended weight of radiator with water. Cantilever Load @ 60mm from wall (12.5mm Plasterboard)	55 Kg	100 Kg
Minimum Cavity Required	20mm	20mm

1. Maximum recommended loads apply to plasterboard (British Gypsum Gyproc Wallboard) in a dry condition. Please note that variations in board mounting, moisture content, plasterboard brand or physical condition of board can adversely effect load bearing performance. Continuous and repetitive loading / unloading on the fixing will weaken plasterboard.
2. All recommended loads assume a minimum distance from the edge of the board of 50mm.
3. For all maximum recommended loads required safety factors are considered.
4. Fixing Material - Glass Filled Nylon.

Pack Options come in 2 colours:  
Contains 4 brackets and necessary fixings


RAD-SUP-W (White)  
RAD-SUP-A (Anthracite)  
RAD-SUPEX-W (White)  
RAD-SUPEX-A (Anthracite)

# Bullfix Radiator Brackets- Data Sheet


Bracket Dimensions



## RAD-SUP-....

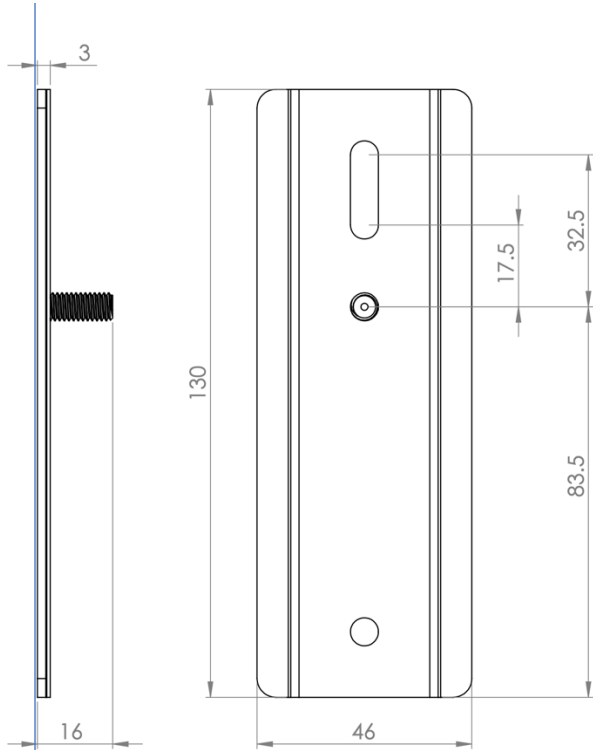

## RAD-SUPEX-...

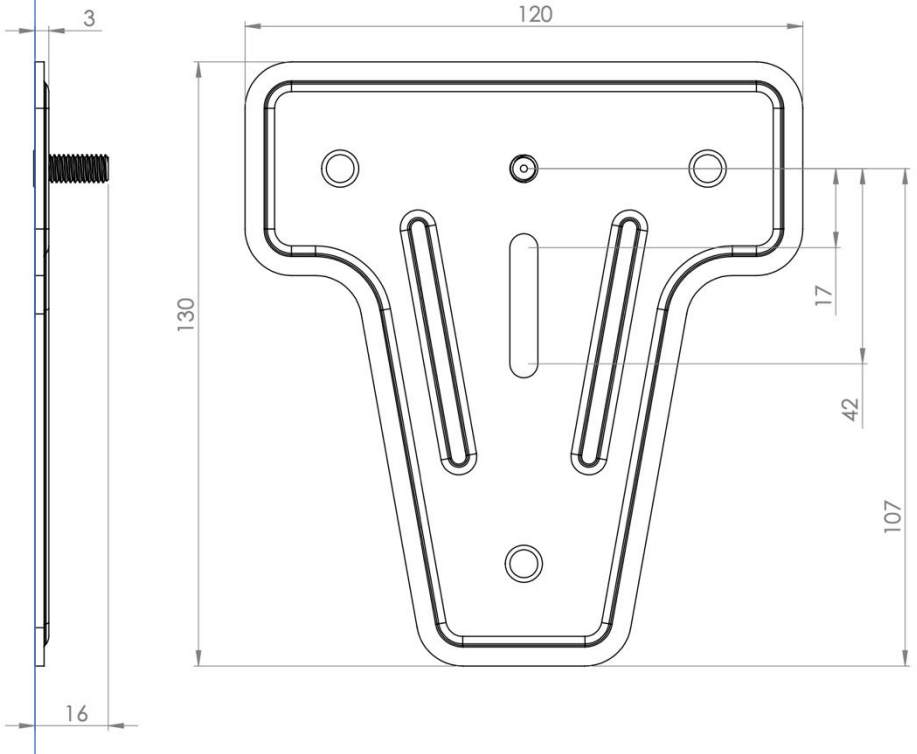

# Bullfix Radiator Brackets- Data Sheet

Application Advice



## Radiator Brackets:

We only recommend mounting items on plasterboard with Bullfix fixings using an appropriate bracket arrangement. The bracket should adhere to the specification shown below.

Dimension "X" is how far the center of gravity is away from the wall

Dimension "Y" is height of vertical engagement with the wall from the top fixing

"Y" must be at least 1.5 times bigger than "X"

